



The GranView *Masonry*

High Efficiency, Heat Circulating Fireplace



Ancient Iron Door

WILKENING
Fireplace



Prairie Door



The GranView is in a class by itself, being the only UL listed, masonry installed, high efficiency, heat circulating fireplace. The window of flame provides a beautiful focal point for any room, without any unsightly internal obstructions. The masonry design stores heat from the fire, warming your home long after the fire has burnt out.



Rectangular Black Door



Ancient Iron Door




Prairie Door



Rectangular Nickel Door

DOOR OPTIONS

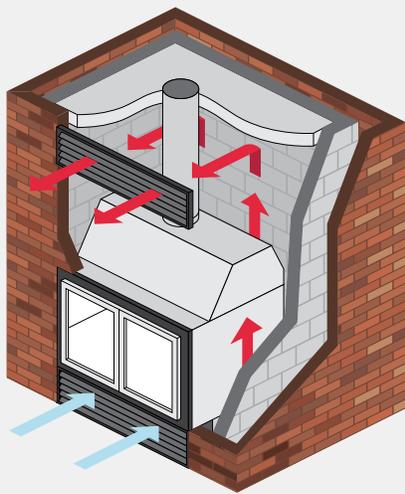

UNIQUE AIR SUPPLY SYSTEM

The GranView incorporates a unique, self-regulating, combustion air supply that directs outside air to every supply port inside the fire chamber. By directing combustion air from outside to the fireplace, heated room air is not lost up the chimney when you are burning a fire. “Fireplace odor” or cold drafts will never invade your home when the fireplace is not in use.

A specially designed air wash provides ample flow of incoming air for clear viewing of the fire. Natural convection moves the heated air through your home at over 300 cubic feet per minute.

95.4% COMBUSTION EFFICIENT DESIGN


While you’re relaxing in the warmth of the fire, the GranView is hard at work burning the smoke that is wasted by normal fireplace designs. This clean-burning fireplace limits hydrocarbon emissions, reducing creosote accumulation in the chimney.



Taconite Trim Ancient Iron Door



Taconite Trimmed Ancient Iron Door

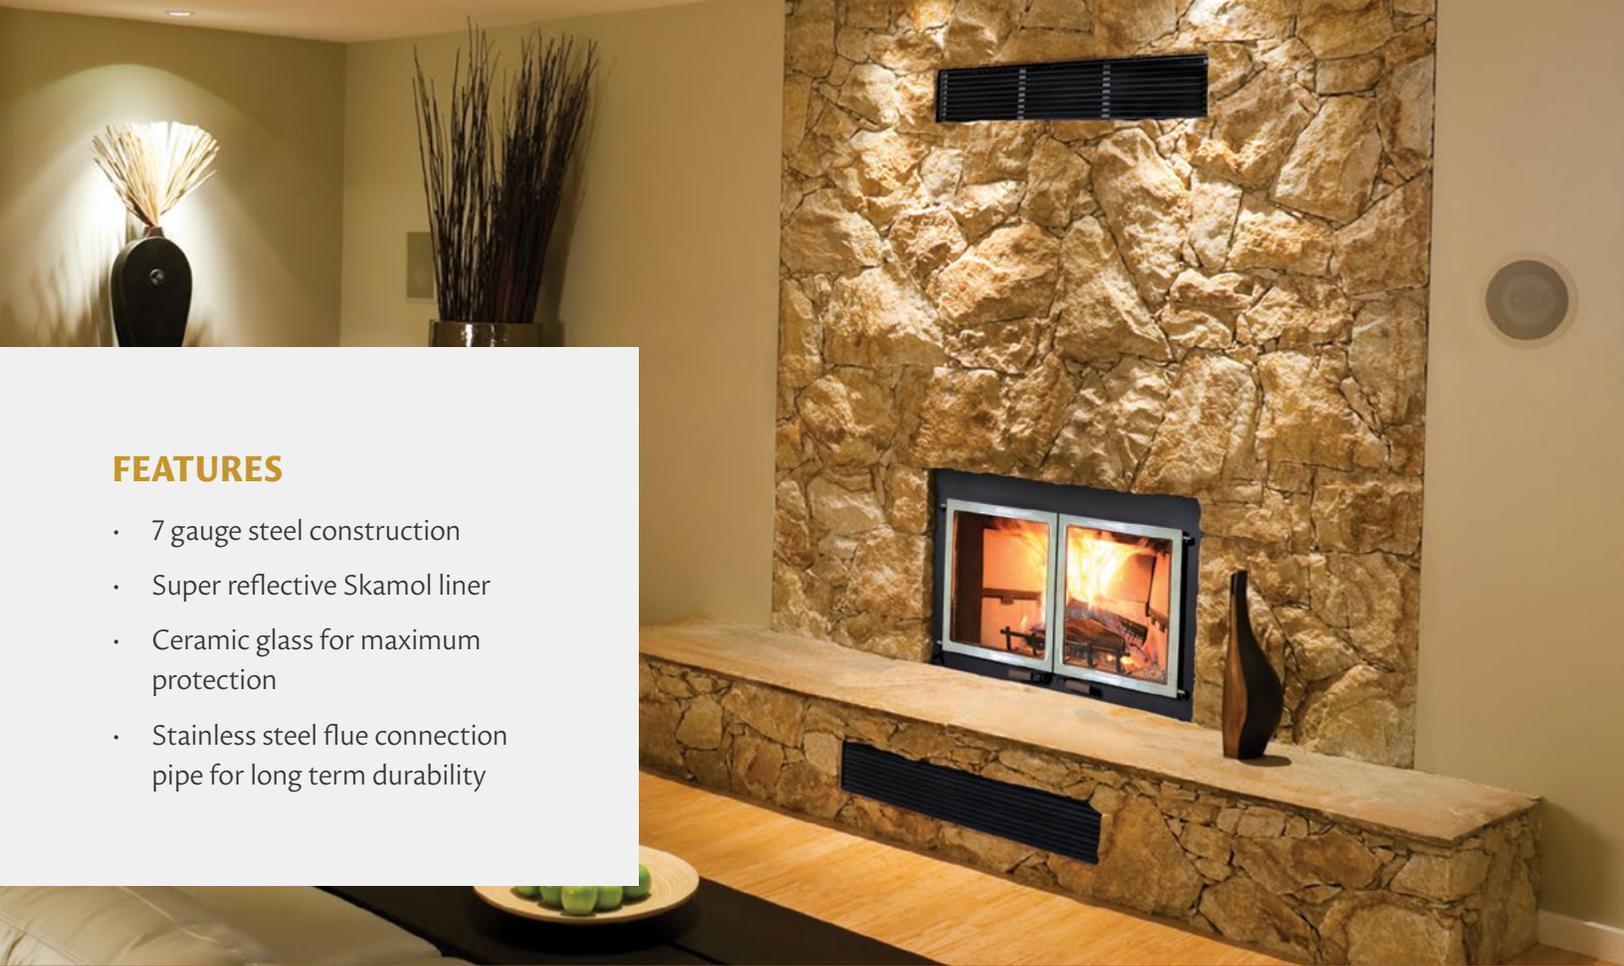

FEATURES

- 7 gauge steel construction
- Super reflective Skamol liner
- Ceramic glass for maximum protection
- Stainless steel flue connection pipe for long term durability

Nickel Rectangular Door



Screen for Open Burning

WILKENING *Fireplace*

9608 State 371 N.W., Walker, MN 56484

www.wilkeningfireplace.com
wilkenfp@eot.com | **800-367-7976**

Photography by Lance White - www.lancewhitephotography.com
Brochure Design by ColorForge Creative - www.colorforge.com

Revised 10-2019

SPECIFICATIONS

Firebox capacity	4.2 cu. ft.
Emissions	2.72 g/kg
Log length	24" average
Chimney size	8" round or 8x12 minimum
Weight	525
Convection air circulation of 300 cu. ft. / minute. Blowers optional.	
Optional fire screen for open door use.	
Listed to UL 127 and 1482 by Intertek Testing. Complies with EPA requirements as a fireplace.	
Each unit is standard with an air tight door with ceramic glass and a 5' intake kit with screened vent. Optional door styles, finishes and air circulation blower available.	

YOUR DEALER IS:

