

WILKENING
Fireplace

Magna-Fyre *II*

High Efficiency Zero Clearance Fireplace



Magna-Fyre *II* with Prairie Door

ALL-NEW DESIGN

The original Magna-Fyre has been redesigned to include these great new features:

- Removable glass door assembly for easy replacement or upgrade years after the fireplace has been installed.
- Redesigned glass door that increases durability and uses off the shelf, locally available gasket replacement.
- Cam activated door latch for smooth operation that increases the seal while allowing it to be easy to operate.
- Large single door option that eliminates any visual obstruction of the fire.
- New preformed high density liner in the firebox that allows the fire to start more quickly and burn hotter, increasing the reflective heat to prolong clear viewing of the fire and reduce start up emissions.



Magna-Fyre II with single black door and dual heat vent option



Rectangular Black Door



Arched Black Door



Single Black Door



Prairie Door



Maximum Fire View

With a 30 ½" opening, the Magna-Fyre II has the largest fire view of any wood burning fireplace in its class. This window of flame provides a beautiful focal point for any room, without any unsightly internal obstructions.

94% COMBUSTION EFFICIENT DESIGN

While you're relaxing in the warmth of the fire, the Magna-Fyre II is hard at work burning the smoke that is wasted by normal fireplace designs. This clean-burning fireplace limits hydrocarbon emissions, reduces creosote accumulation in the chimney and clears the air we breathe.

FLEXIBLE DESIGN OPTIONS

The elegant style of our arched or rectangular doors can be enhanced with optional gold or nickel plating to create a fireplace design with unlimited decorating options. Choose the look you desire by finishing your installation with brick, stone, tile, stucco or a manufactured facing material to create the fireplace of your dreams.

UNIQUE AIR SUPPLY SYSTEM

The Magna-Fyre II incorporates a unique combustion air supply system that directs outside air to every supply port inside the fire chamber. By directly connecting the combustion air from outside the home to the unit, heated room air is not lost up the chimney when you are burning a fire. "Fireplace odor" or cold drafts will never invade your home when the fireplace is not in use.

A specially designed air wash provides ample flow of incoming air to continually sweep the glass clean and create a dramatic flame pattern.

ZERO CLEARANCE INSTALLATION

Our zero clearance surround provides easy, cost effective installation. A special foundation or support is not required to install the fireplace.




Rectangular Nickel Door







Arched Nickel Door



Arched Gold Door



Cast Iron Vent

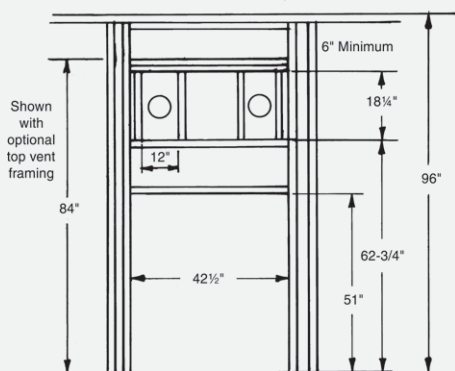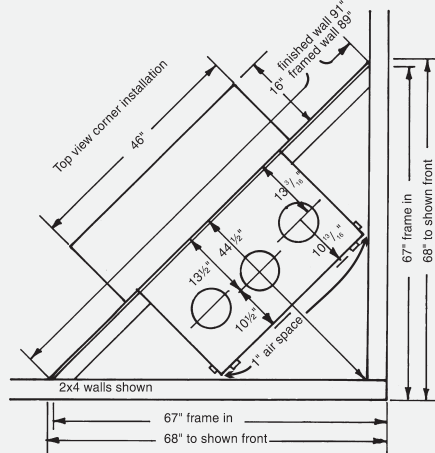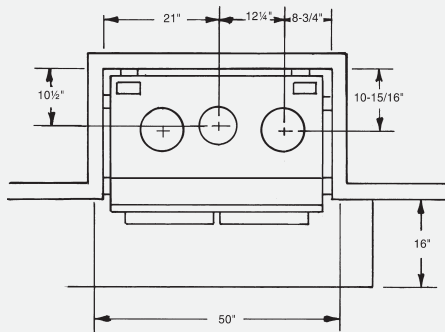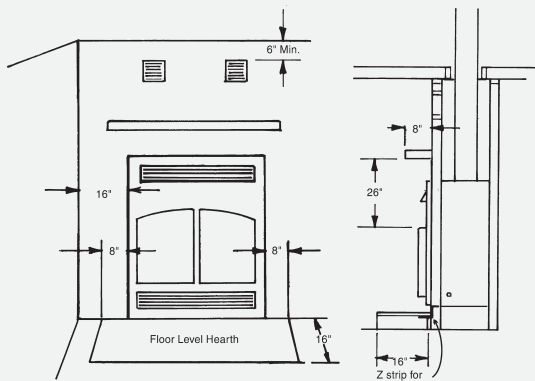

Magna-Fyre II with Arched Nickel Door and black upper heat outlet louver

SPECIFICATIONS

BTU output	65,000 per hour
Estimated heating capacity	2,000 sq. ft.
Overall efficiency	71%
Log length	22" average
Framing dimensions	42 1/2" W x 51" H x 24" D
Chimney size	8" diameter
Weight	625 lbs.

Mobile home approved

INCLUDED	OPTIONAL FEATURES
Main firebox/heat exchanger	Upper heat outlet louver in black, brass or nickel
Air tight doors with ceramic glass	Dual heat vent kit
Lower room air inlet grill with two speed fan control	Two-speed fan
Five foot outside air kit and vent	Furnace ducting kit
	Masonry facing kit for veneer finishes
	Full depth (real masonry) lintel iron

WILKENING
Fireplace

9608 State 371 N.W., Walker, MN 56484

www.wilkeningfireplace.com

wilkenfp@eot.com | **800-367-7976**

Photography by Lance White - www.lancewhitephotography.com

Brochure Design by ColorForge Creative - www.colorforge.com

YOUR DEALER IS: